

Request For Quotation

Order the parts you need from our real-time inventory database. Simply complete a request for quotation form with your part information and a sales representative will respond to you with price and availability.

[Request For Quotation](#)

Your free datasheet starts on the next page.

More datasheets and data books are available from our homepage: <http://www.datasheetarchive.com>

GP1A30R

OPIC Photointerrupter with Encoder Function

■ Features

1. 2-phase (A, B) digital output
2. Possible to use plastic disk
3. High sensing accuracy
(Disk slit pitch : 0.7mm)
4. TTL compatible output
5. Compact and light

■ Applications

1. Electronic typewriters, printers
2. Numerical control machines

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	65	mA
	*1Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	100	mW
Output	Supply voltage	V_{CC}	7	V
	Low level output current	I_{OL}	20	mA
	Power dissipation	P_O	250	mW
Operating temperature		T_{opr}	0 to + 70	°C
Storage temperature		T_{stg}	- 40 to + 80	°C
*2Soldering temperature		T_{sol}	260	°C

*1 Pulse width ≤ 100μs, Duty ratio= 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

(Unless otherwise specified, Ta = 0 to + 70°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	Ta= 25°C, I_F = 30mA	-	1.2	1.5	V
	Reverse current	I_R	Ta= 25°C, V_R = 3V	-	-	10	μA
Output	Operating supply voltage	V_{CC}		4.5	5.0	5.5	V
	High level output voltage	V_{OH}	*3 V_{CC} = 5V, I_F = 30mA	2.4	4.9	-	V
	Low level output voltage	V_{OL}	*3 I_{OL} = 8mA, V_{CC} = 5V, I_F = 30mA	-	0.1	0.4	V
	Supply current	I_{CC}	*3*4 I_F = 30mA, V_{CC} = 5V	-	5	20	mA
Transfer characteristics	Duty ratio	*5 D_A	V_{CC} = 5V, I_F = 30mA, *3f = 2.5kHz	20	50	80	%
		*5 D_B		20	50	80	%
	Response frequency	f_{MAX}	*3 V_{CC} = 5V, I_F = 30mA	-	-	5	kHz

*3 Measured under the condition shown in Measurement Conditions.


*4 In the condition that output A and B are low level.

*5

$$D_A = \frac{t_{AH}}{t_{AP}} \times 100, \quad D_B = \frac{t_{BH}}{t_{BP}} \times 100$$


■ Outline Dimensions

(Unit : mm)

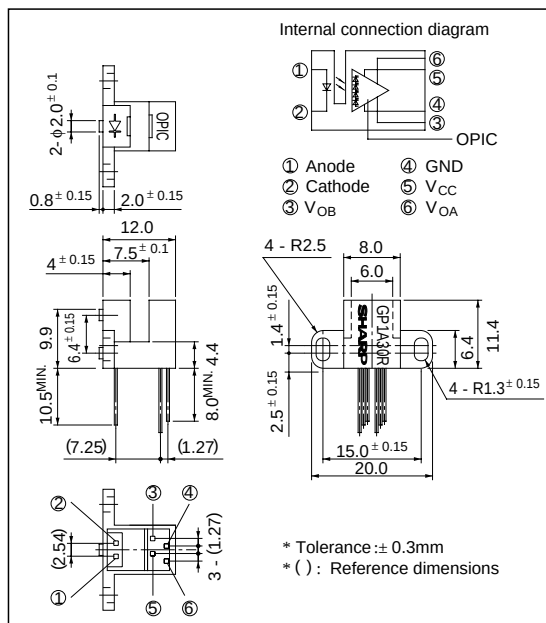

*** OPIC™ (Optical IC) is a trademark of the SHARP Corporation.
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Output Waveforms

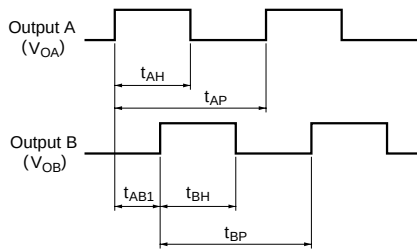

Rotational direction: Counterclockwise when seen from OPIC light detector

Fig. 1 Forward Current vs. Ambient Temperature

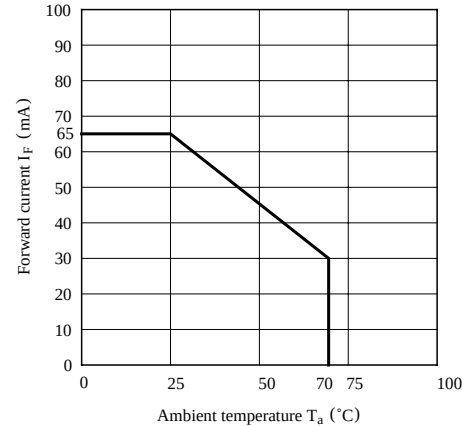


Fig. 2 Output Power Dissipation vs. Ambient Temperature

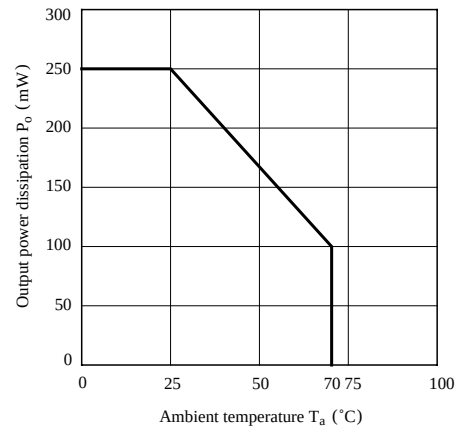


Fig. 3 Duty Ratio vs. Frequency

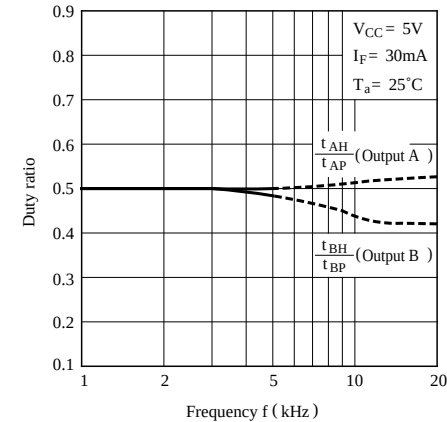


Fig. 4 Phase Difference vs. Frequency

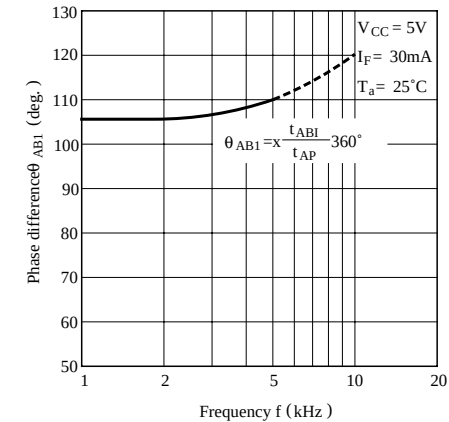


Fig. 5 Duty Ratio vs. Ambient Temperature

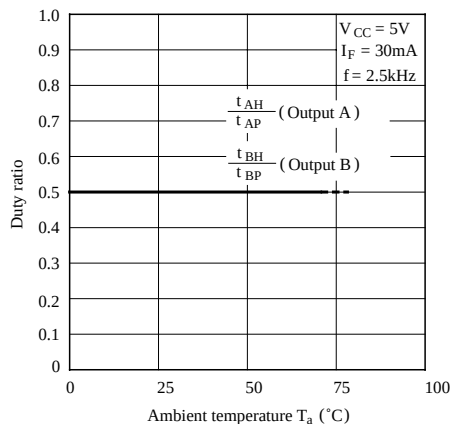


Fig. 6 Phase Difference vs. Ambient Temperature

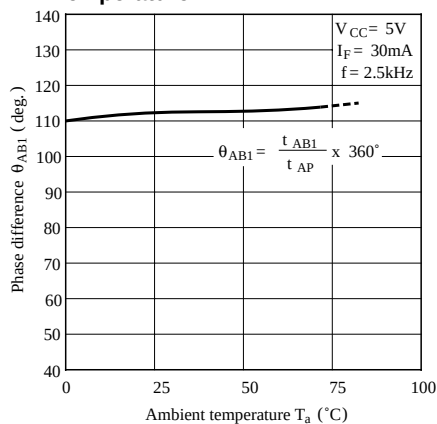


Fig. 7 Duty Ratio vs. Distance (X direction)

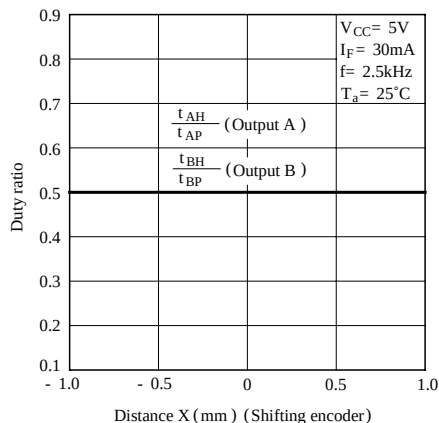


Fig. 8 Phase Difference vs. Distance (X direction)

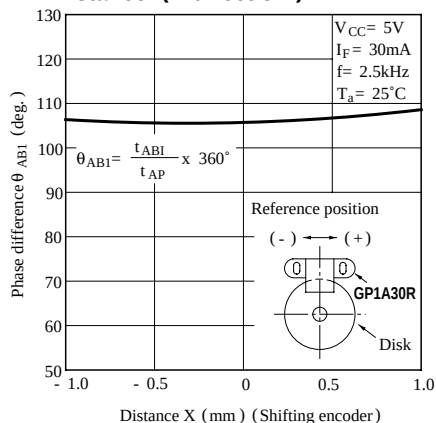


Fig. 9 Duty Ratio vs. Distance (Y direction)

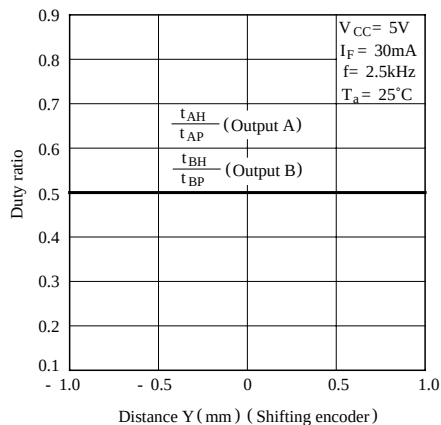


Fig.10 Phase Difference vs. Distance (Y direction)

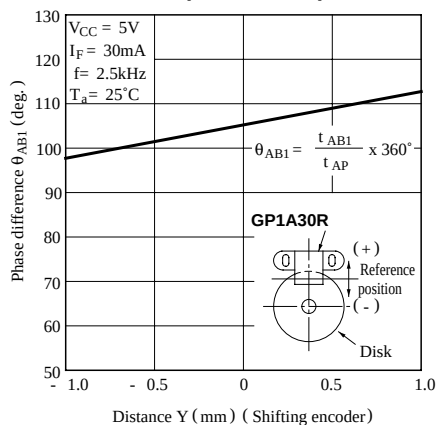


Fig.11 Duty Ratio vs. Distance (Z direction)



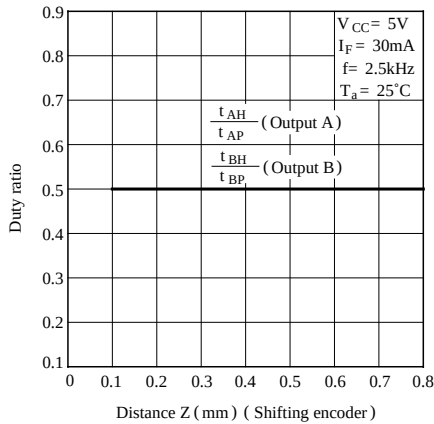


Fig.12 Phase Difference vs. Distance (Z direction)

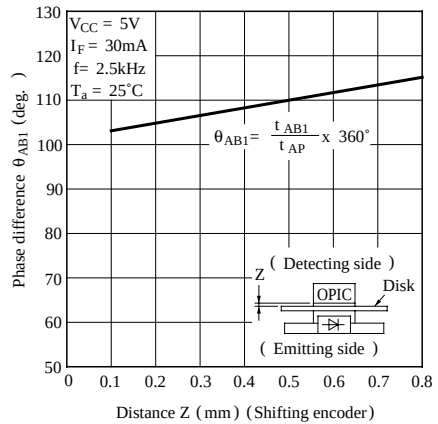

Measurement Conditions

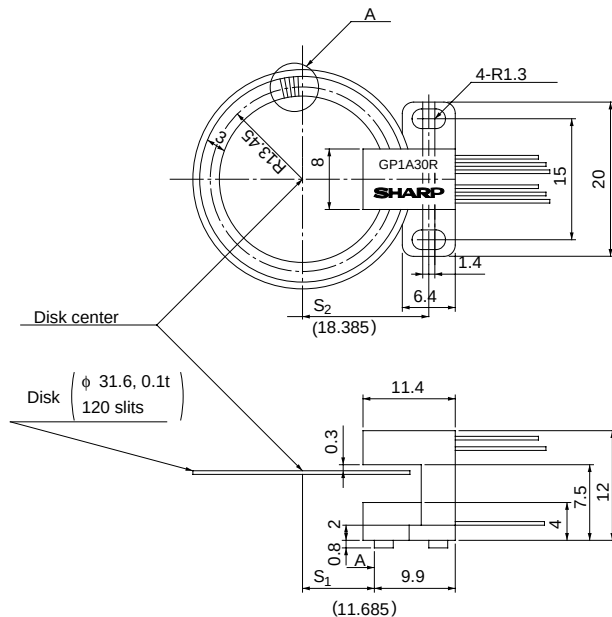

Precautions for Use

- (1) This module is designed to be operated at $I_F = 30mA$ TYP.
- (2) Fixing torque : MAX. 0.6Nm (6kgf • cm)
- (3) In order to stabilize power supply line, connect a by-pass capacitor of more than $0.01\mu F$ between V_{CC} and GND near the device.
- (4) As for other general cautions, refer to the chapter "Precautions for Use".

<Basic Design>

R_O (distance between the disk center and half point of a slit),
 P (slit pitch), S_1 and S_2 (installing position of photointerrupter)
 will be provided by the following equations.

Slit pitch: P (slit center)


$$R_O = \frac{N}{120} \times 13.45 \text{ (mm)} \quad N: \text{number of slits}$$

$$P = \frac{2 \times p \times R_O}{N} \text{ (mm)}$$

$$S_1 = R_O - 1.765 \text{ (mm)}, S_2 = S_1 + 6.7 \text{ (mm)}$$

Note) When the number of slits is changed, values in parenthesis are also changed according to the number.

Enlarged drawing
 of A portion
 Slit pitch : P



(Ex.) In the case of
 $N = 200P/R$

$$R_O = \frac{200}{120} \times 13.45 \text{ (mm)}$$

$$= 22.42 \text{ mm}$$

$$P = \frac{2 \times p \times 22.42}{200} \text{ (mm)}$$

$$= 0.704 \text{ mm}$$

$$S_1 = 22.42 - 1.765$$

$$= 20.655 \text{ mm}$$

$$S_2 = 20.655 + 6.7$$

$$= 27.355 \text{ mm}$$